Manta Térmica para Baterías

Battery Heating Blanket with Thermostat



Rango del Termostato: 30°C

Las mantas térmicas industriales controladas por termostato proporcionan un calentamiento óptimo independiente de la temperatura ambiente. A una temperatura de 30 °C, la batería alcanza su máxima capacidad de arranque en frío (CCA).

Thermostat-controlled industrial heating blankets provide optimal heating independent of the ambient temperature. At a temperature of 30°C, the battery reaches its maximum Cold Cranking Amps (CCA) capacity.


CARACTERÍSTICAS DESTACADAS / KEY FEATURES

- Protección del Sistema: El termostato integrado elimina el riesgo de daños en la batería provocados por sobrecalentamiento y derrames de ácido.
- Ajuste Seguro: Incluye una correa ajustable de alta resistencia mecánica para asegurar la manta firmemente alrededor de la batería.
- Instalación óptima: Para un calentamiento eficiente, traslapar correctamente la manta y asegurar que el termostato permanezca en contacto directo con la batería.
- Traslape Máximo: El traslape máximo permitido es de 10" (25 cm).
- Recomendación de Espacio: En caso de instalarse dentro de un gabinete o caja, se recomienda una separación mínima de 1.5" (38 mm) entre la batería y las paredes del contenedor.


- System Protection: The integrated thermostat eliminates the risk of battery damage caused by overheating and acid spills.
- Secure Fit: Includes a high-mechanical-strength adjustable strap to secure the blanket firmly around the battery.
- Optimal Installation: For efficient heating, properly overlap the blanket and ensure the thermostat remains in direct contact with the battery.
- Maximum Overlap: The maximum allowable overlap is 10" (25 cm).
- Clearance Recommendation: If installed inside a cabinet or box, a minimum clearance of 1.5" (38 mm) is recommended between the battery and the container walls.

MODELOS ESTÁNDAR (ENCHUFE NEMA) / STANDARD MODELS (NEMA PLUG)

Grupo de Batería Battery Group	Perímetro Batería Battery Perimeter	Voltios Volts	Watts	Longitud Manta Blanket Length	Cable de Poder Power Cord
22NF	24-32" (610-813 mm)	240	50	34" (864 mm)	2 mts
24, 24F, 24H, 24R, 24T, 25, 27, 27H, 34, 34R, 35, 75, 78, GC2	32-40" (813-1016 mm)	240	65	42" (1067 mm)	2 mts
30H, 31	40-48" (1016-1219 mm)	240	80	50" (1270 mm)	2 mts
2E	48-56" (1219-1422 mm)	240	100	58" (1473 mm)	2 mts
4D, 6D	56-64" (1422-1626 mm)	240	130	66" (1676 mm)	2 mts
8D	64-72" (1626-1829 mm)	240	160	74" (1880 mm)	2 mts

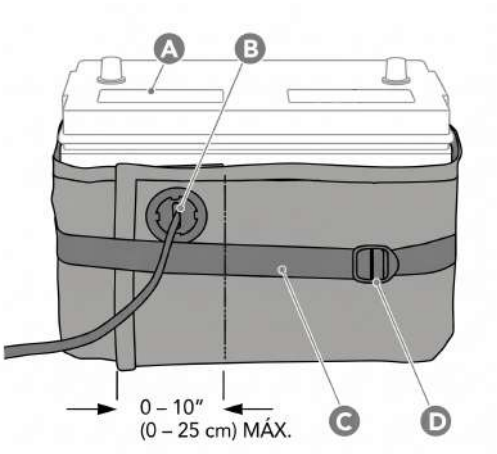

A: Batería
B: Cable de poder
C: Correa ajustable
D: Hebilla
MÁX. 0 – 10" (0 – 25 cm): Superposición / Traslape máximo permitido.

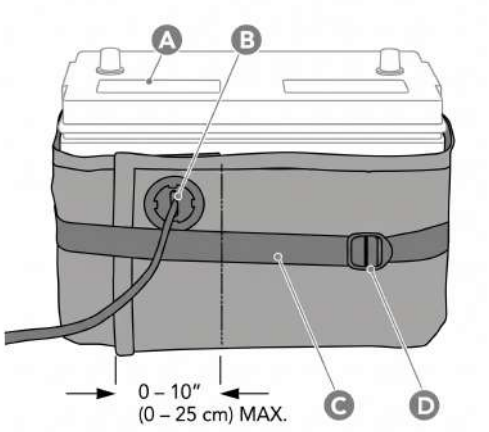

A: Battery
B: Power cord
C: Adjustable strap
D: Buckle
MAX 0 – 10" (0 – 25 cm): Maximum allowable overlap.