COMIND INDUSTRIES

Chile



Termopozo 1/2 NPT
300mm SS316

ZERO EMISSION

comind.cl





Descripción / Description

ES: Termowell 1/2 NPT 300mm SS316 variante de mayor longitud, 300 mm de inserción, conexión roscada 1/2 NPT en ambos extremos y vaina en acero inoxidable 316. Diseñada para grandes ductos, estanques de proceso o tuberías de gran diámetro. Donde se necesita que el punto de medición esté suficientemente alejado de la pared para evitar lecturas distorsionadas por transferencia de calor a través del propio ducto.


EN: 1/2 NPT 300 mm SS316 thermowell—longer version, with a 300 mm insertion length, 1/2 NPT threaded connections at both ends, and a 316 stainless steel sheath. Designed for large ducts, process tanks, or large-diameter pipes. It is used where the measurement point needs to be sufficiently far from the wall to prevent readings from being distorted by heat transfer through the duct itself.



ESPECIFICACIONES TÉCNICAS / TECHNICAL SPECIFICATIONS

PARÁMETRO/ PARAMETER	ESPECIFICACIONES/ SPECIFICATION
Conexión a proceso / Process connection	1/2 NPT
Conexión a cabezal / Head connection	1/2 NPT
Longitud de inserción / Insertion length	300 mm
Material de vaina / Sheath material	Acero inoxidable 316 / 316 stainless steel

Dimensiones / Dimensions

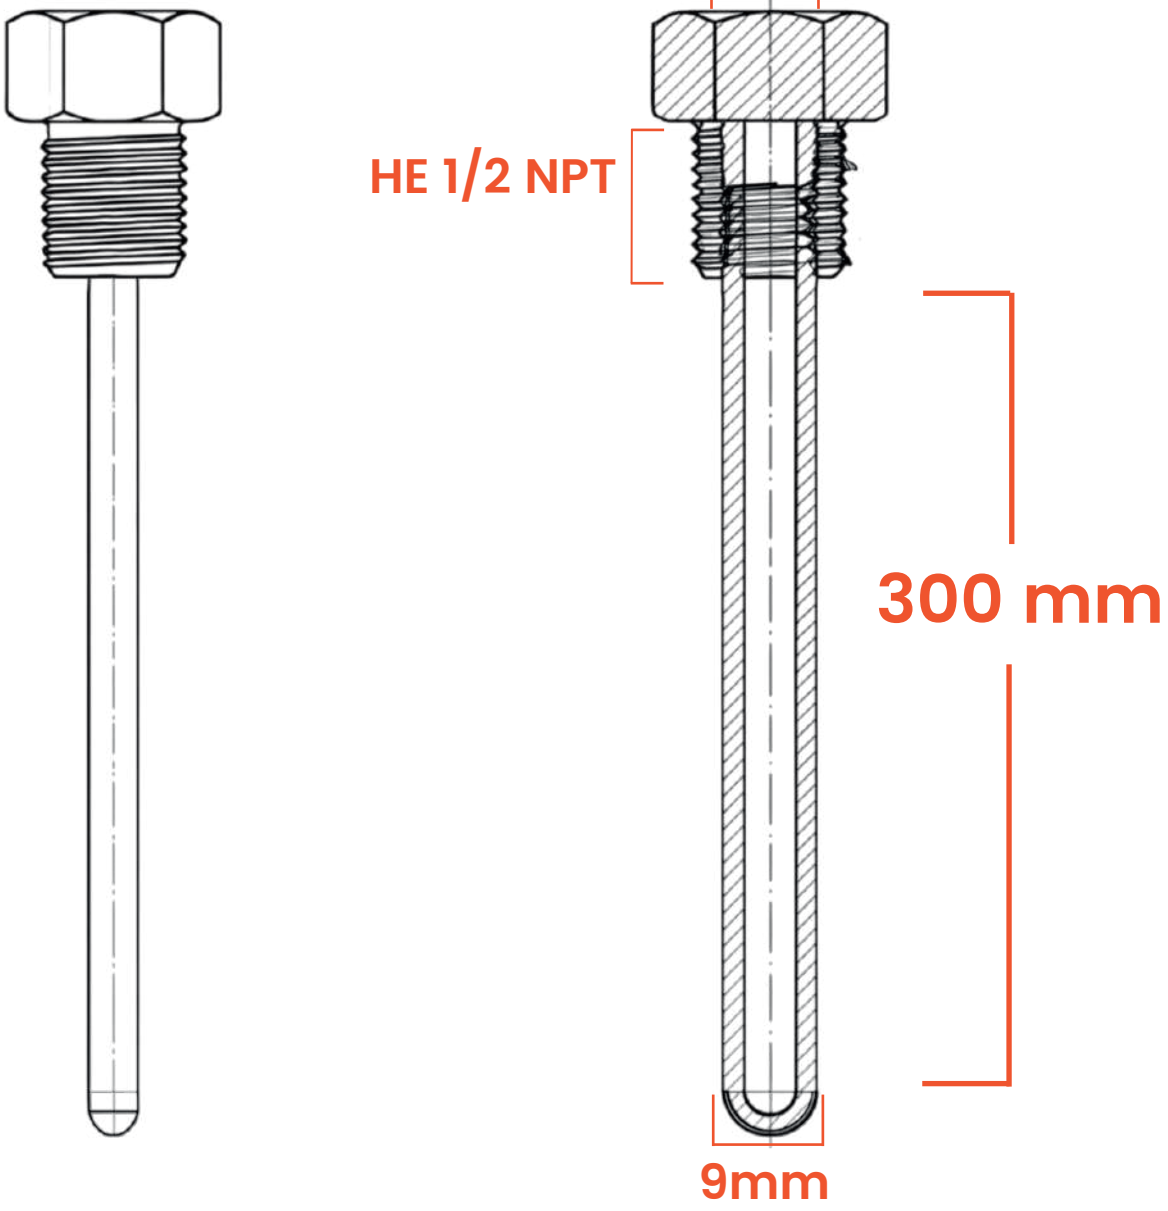

COMIND INDUSTRIES

Sucursales en Chile / Branches in Chile

VENTAS Y CORPORATIVO / SALES AND CORPORATE
info@comindindustries.com

FABRICA Y RETIROS / FACTORY AND PICKUP LOCATIONS
info@comindindustries.com

COMIND SUR / COMIND SOUTH
info@comindsur.cl

COMIND NORTE / COMIND NORTH
info@comindnorte.cl

Chile

Innovando
por un mundo +
VERDE

Conoce nuestra Familia de Productos / Discover Our Product Family

YOMOGA CONNECT
IH3 INDUSTRIAL HEATING BLANKET
VENTILO CARE
Pressure Solutions
COMIND TRACE
COMIND CONNECT
HOME COMIND
COMIND PROJECTS
COMIND Thermal Solutions
AISCOM AISLANTES Y COMPONENTES